J & E Supply & Fastener Co., Inc.
jandesupply.com

1903 SE 59th St · Oklahoma City, Oklahoma 73129 · 405-670-1234
1001 S 12th St · Duncan, Oklahoma 73533 · 580-255-2582


TECH DATA

M2×0.4 × 4mm Set Screw

Steel · Plain · DIN 916

THE PART

Part number	**MSC002C004SSP**
Type	**Socket set screw, DIN 916**
Point	**Cup point**
Thread	**M2 × 0.4 (coarse)**
Length	**4 mm overall, end to end**
Hex key	**0.9 mm (Allen wrench)**
Material	**Steel**
Finish	**Plain**

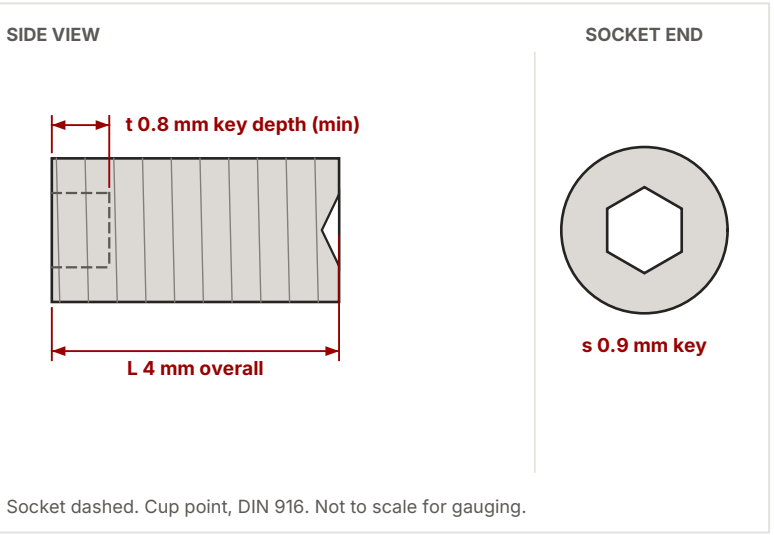

Socket dashed. Cup point, DIN 916. Not to scale for gauging.

THREAD

M2 × 0.4

Coarse pitch, 0.4 mm

HEX KEY

0.9 mm

Allen wrench / hex bit
Goes in at least 0.8 mm

POINT

Cup point

Cup dia. 1 mm max

DIMENSIONS · DIN 916

s Hex key	**0.9 mm**
t Key depth (min)	**0.8 / 1.7 mm (short / long)**
Cup point dia. (max)	**1 mm**
L Length, overall	**4 mm**

Millimetres. Set screws are rated by hardness (class 45H steel), not tensile strength.

WHICH POINT

Cup point is the everyday choice — its edge bites into the shaft. Flat point for parts you adjust often or a shaft with a flat; dog point to sit in a hole or slot in the shaft; cone point to locate in a drilled spot.

Information only, summarized from the published standards and makers' data on our reference pages at jandesupply.com (11/25/2026). Standard values, not a test of this lot — the current edition of the governing standard governs. J & E Supply makes no warranty of suitability for any use; for critical work, confirm against the standard and the maker's certifications and test your application. J & E Supply is an independent distributor.

1903 SE 59th St · Oklahoma City, Oklahoma 73129 · 405-670-1234
1001 S 12th St · Duncan, Oklahoma 73533 · 580-255-2582

TECH DATA

M2×0.4 × 4mm Set Screw

Steel · Plain · DIN 916

HOW TO MEASURE

Measure overall, end to end, in millimetres - there is no head, so the socket end and the point are both part of the length. M2 is the thread diameter, 0.4 mm the pitch.

METRIC SET SCREW CHART

Scan for every size: key, depth and points.

jandesupply.com · Resources

USE IT WITH

A 0.9 mm hex key (Allen wrench)

In an M2 × 0.4 tapped hole.

Information only, summarized from the published standards and makers' data on our reference pages at jandesupply.com (11/25/2026). Standard values, not a test of this lot — the current edition of the governing standard governs. J & E Supply makes no warranty of suitability for any use; for critical work, confirm against the standard and the maker's certifications and test your application. J & E Supply is an independent distributor.